


PTO离合器

PTO Clutch

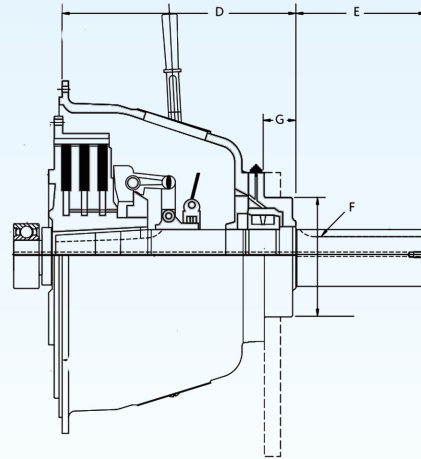

型号尺寸 Dimensions Data

型号 Model	SAE 飞轮壳 Housings	D	输出轴 Output shaft			F	G	重量 kg Weight	齿数 Teeth
			E	直径 Dia	键槽 Keyway				
C106 C107	5, 4	181.0	88.9	36.53	3/8×3/16	54.0	117.5	30	42
C108	5, 4, 3	181.0	152.4	44.45	1/2×1/4	57.2	127.0	37	51
C110	4, 3	219.1	139.7	57.15	5/8×5/16	95.3	142.9	53	63
SP111	3, 2, 1	235.0	165.1	57.15	5/8×5/16	95.3	146.1	65	72
SP211	3, 2	244.5	165.1	63.50	5/8×5/16	76.2	158.8	71	72
SP311	3, 2	352.4	254.0	88.90	7/8×7/16	85.7	190.5	106	72
SP114	1, 0	308.0	215.9	76.2	3/4×3/8	95.3	168.3	119	59
SP214	1, 0	349.3	254.0	88.9	7/8×7/16	85.7	190.5	151	59
SP314	1, 0	368.3	254.0	100.0	1×1/2	85.7	190.5	187	59
IBF314	1, 0	425.5	254.0	100.0	1×1/2	92.1	317.5	270	59
SP318	0, 0	463.6	254.0	114.3	1×1/2	66.7	254.0	407	75

技术参数 Technical Parameter

“X” 距离 (mm) 允许的最大侧载荷 (kgf)						最大输入扭矩值 (N.m)		最大转速 r/min	
型号 Model	转/分钟 r/min	“X”	侧负荷		“X”	侧负荷			
C106 C107	1800 3500	203	300	200	229	200	200	232 259	3500 3200
C108	1800 3100	254	600	500	305	400	400	336	3100.00
C110	1800 2800	305	900	800	356	600	600	481	2800.00
SP111	1800 2500	305	1000	900	356	700	600	660	2500.00
SP211	1800 2500	330	900	800	381	700	600	1321	2500.00
SP311	1800 2300	457.0	900	900	559.0	300	500	2367.0	2300.0
SP114	1800 2300	406.0	900	1000	508.0	500	600	1169.0	2300.0
SP214	1800 2300	457.0	1300	1000	559.0	500	700	2337.0	2300.0
SP314	1800 2300	483.0	1200	1100	584.0	800	700	3506.0	2300.0
IBF314	1800 2300	559.0	2500	2700	686.0	2100	2300	35065.0	2300.0
SP318	1800 2100	584.0	2730	2880	686.0	1770	1860	8765.0	2100.0